

# ECO-GRADE™ PAINT & ADHESIVE REMOVER



## SP™ 405

VOC  
COMPLIANT

VOC Compliant Nationally

FLASH  
POINT  
°F/°C  
200/93

Flash Point: 200 °F (93 °C)

SOY

Soy based

BASE



Conforms to manufacturer's  
Green Cert™ Specifications

H 2

F 3

R 0

HMIS Hazard Rating:  
Health (2) • Flammability (3) • Reactivity (0)

- Made from Renewable Resources
- Formulated with EPA DfE Certified Materials
- Removes Coatings in Minutes
- Long Working Dwell Times
- Excellent Ability to Stick to Vertical Surfaces
- Low Odor



PRESERVE. PROTECT. PREVENT.™

Sprayon® SP™ 405 Eco-Grade™ Paint & Adhesive Remover is a next generation, environmentally safe, premium coating stripper formulated to remove multiple layers of oil and latex paints, but will also remove many other coatings like epoxies, urethanes, elastomeric and chlorinated rubber. Designed without methylene chloride, MEK, or other harsh flammable chemicals, it has long dwell times and excellent ability to stick to vertical surfaces.



## SPECIALTY PRODUCTS

### USES

- For the easy and safe removal of coatings on a variety of substrates including wood, brick, stone, metal, graphite, glass, brick, ceramic tile, concrete, and steel.

### APPLICATION

Use in well ventilated areas. Shake can for 1 minute. Protect surrounding areas from overspray. Wear rubber gloves, face and eye protection. Spray heavy coat with a steady back and forth motion keeping spray upright 8" to 10" from surface. Allow product to penetrate into paint finish or gasket cement. WATCH for the following: SOFTENING: Approximately 10 minutes. BLISTERING: Approximately 20-30 minutes. A second application might be necessary. When chemical action is complete, scrape off with flexible putty knife or squeegee. Rinse thoroughly with water wash. Allow surface to dry completely before applying a new finish. Prime coat metal as soon as possible to prevent rusting. For best results, use at room temperature (70°F - 90°F).

### CERTIFICATIONS



### PERFORMANCE

- Removes lacquer, enamels, graffiti, varnish, shellac, baked on coatings, labels and decals
- Removes adhesives and backed-on gaskets
- Leaves surface ready to paint or decorate

NOTE: SP™ 405 can be damaging to some plastics, fiberglass or synthetic materials. User accepts all responsibility for such use. Do not allow to dry on surface.

### PACKAGING

STOCK #: S00405000  
 UPC CODE: 0-75577-84927-7  
 FILL WT.: 12 oz.  
 PER CASE: 12  
 CARTON DIMENSIONS:  
 L 11.13" x W 8.44" x H 8.38"

### PROPERTIES

APPEARANCE: Light Brown  
 ODOR: Mild  
 PROPELLANT: Hydrocarbon  
 % ACTIVE: > 35%  
 WT./GAL.: 7.15  
 SPECIFIC GRAVITY: 0.83  
 V.O.C. COMPLIANT CALIFORNIA: Yes  
 V.O.C. COMPLIANT OTC STATES: Yes  
 % V.O.C.: 19%  
 FLAMMABLE: Yes  
 FLASH POINT: > 200 °F  
 HAZARD RATING: 2,3,0  
 SHELF LIFE: 3 years from date of manufacture

### RESOURCES

MSDS/EDS/PRODUCT DATA  
 SHEETS: [sprayon.com](http://sprayon.com)  
 CUSTOMER SERVICE:  
 1-800-777-2966  
 TECHNICAL INFORMATION:  
 1-800-251-2486

### SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.




SP405

### \*Green Cert's mission:

To reduce environmental impact and to meet or exceed the most stringent regulatory requirements without sacrificing product quality. To learn more, please visit [GreenCert.com](http://GreenCert.com)

\*\*All products displaying the EPA DfE logo have been Formulated in Partnership with EPA Design for the Environment Formulator Initiative and or use ingredients that are EPA DfE Certified.

\*\*\*Any product that does not contain greenhouse gases will have the greenhouse gas free logo on the label. For a complete listing of all our greenhouse gas free products, visit our website or contact our customer service department at 800-777-2966.

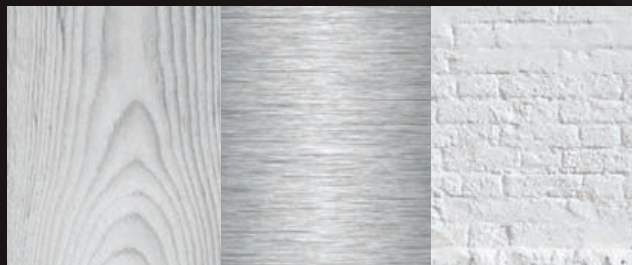

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

**Lawson Products, Inc.**

To order these and other products, contact us:

866-529-7664 [lawsonproducts.com](http://lawsonproducts.com)

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**

101 Prospect Ave. NW  
Cleveland, OH 44115  
[Sprayon.com](http://Sprayon.com)  
1-800-777-2966