


HEAVY-DUTY SPRAY ADHESIVE



SP™ 9000



VOC Compliant



Max.-Min. Operational Temperature Range -20°F to 170°F (-29°C to 76°C)



Fast Tack



Forms Permanent Bonds



Lap Shear 60.68



Peel Strength 9.169



HMIS Hazard Rating:
Health (2) • Flammability (4) • Reactivity (0)

- Heat resistant up to 170°F
- Controlled lace spray pattern
- VOC & MIR compliant
- Tack Range: 10-30 seconds



PRESERVE. PROTECT. PREVENT.™

Sprayon® SP™ 9000 Heavy-duty Spray Adhesive can be used to bond plastic, glass and laminates to tables, cabinets and shelving. Heavy-duty Spray Adhesive has a variable volume controlled, lace spray pattern for stronger bonds and spray control. Does not contain ozone-depleting CFCs.

SPECIALTY PRODUCTS

USES

- Laminates
- Cardboard
- Ceramics
- Paper
- Plastic
- Metal
- Particle board
- Wood

APPLICATION

Use in a well ventilated area. Clean and dry surface, remove any soap, oil, dirt or moisture. Shake can well before use. Adhesive spray works best at room temperature. Hold can 6"-8" upright from surface for an even spray. Lightly spray both sides of substrate. Spraying too close can deliver too much adhesive, increase the drying time and weaken the bond. For best results spray two light coats versus one heavy coat. Wait 30seconds to 1 minute before securing two substrates together. To prevent clogged actuator after use, turn can upside down, spray until nothing else comes out.

RESOURCES

MSDS/EDS/PRODUCT DATA

SHEETS: Sprayon.com

CUSTOMER SERVICE:

1-800-777-2966

TECHNICAL INFORMATION:

1-800-251-2486

PROPERTIES

PROPELLANT: Propane

COLOR: Off White

SPRAY PATTERN: Controlled Lace

TACK RANGE: 10-30 seconds

VOC/MIR: 58%

CARB COMPLIANT: Yes

WT/GAL: 5.64 lb/gal

HAZARD RATING: 2,4,0

COVERAGE: 13 sq. ft.

TEMPERATURE RESISTANCE: 170°F

SHELF LIFE: 24 months from date of manufacture

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

PACKAGING

STOCK #: S09000000

UPC CODE: 0-23275-03577-5

FILL WT.: 16.75 oz.

PER CASE: 12

CARTON DIMENSIONS:


L 11.13" x W 8.44" x H 8.38"



SP9000

	Peel Strength Strength (pli) ¹	Lap-Shear Failing Stress (psi) ²
Sprayon® SP™9000 Heavy Duty Spray Adhesive	9.169 ± 3.678	60.68 ± 16.25
Leading National Brand A	3.367 ± 0.804	67.07 ± 20.38
Leading National Brand C	6.502 ± 2.173	42.43 ± 18.10

¹ASTM D903-98 Standard Test Method for Peel or Stripping Strength of Adhesive Bonds
²ASTM D1002-01 Standard Test Method for Apparent Shear Strength of Single-Lap-Joint Adhesively Bonded Metal Specimens by Tension Loading (Metal-to-Metal)

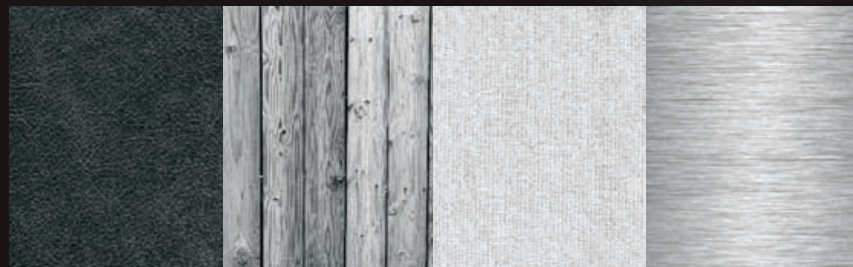

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

Lawson Products, Inc.

To order these and other products, contact us:

866-529-7664 lawsonproducts.com

PRESERVE. PROTECT. PREVENT.



Sprayon® Products

101 Prospect Ave. NW

Cleveland, OH 44115

Sprayon.com

1-800-777-2966

310-PDS-SP9000