

METHYLENE CHLORIDE FREE PAINT REMOVER



SP™ 915



HMIS Hazard Rating:
Health (3) • Flammability (4) • Reactivity (0)



Product is FREE of Methylene Chloride

- Fast penetration
- Cuts through all paint finishes, urethanes, varnishes and shellacs
- Leaves surface clean and ready to repaint
- Methylene chloride free (no chlorinated solvents, caustics, or acids)



PRESERVE. PROTECT. PREVENT.™

Sprayon® SP™915 Methylene Chloride Free Paint Remover has been developed for use in the removal of coatings, varnishes, epoxies and urethanes. The unique surfactant/solvent system allows for rapid penetration and removal of many common coatings.

SPECIALTY PRODUCTS

USES

- Metal
- Stone
- Wood
- Brick
- Glass
- Ceramic tile
- Concrete
- Road signs
- Trucks
- Bridges
- Washroom walls

APPLICATION

Use in a well ventilated area. Shake can for 1 minute. Protect surrounding areas from overspray. Wear rubber gloves, face & eye protection. Spray heavy coat with a steady back and forth motion keeping spray upright 8-10" from surface. Allow product to penetrate into paint finish or gasket cement. **WATCH** for the following: **SOFTENING:** Approximately 10 minutes. **BLISTERING:** Approximately 20-30 minutes. A second application might be necessary. When chemical action is complete, scrape off with flexible putty knife or squeegee. Rinse thoroughly with solvent or water wash. Allow surface to dry completely before applying a new finish. Prime metal as soon as possible to prevent rust. For best results, use at room temperature (70°F-90°F).

PERFORMANCE

- Removes adhesives and backed-on gaskets
- Leaves surface ready to paint or decorate.
- Removes lacquer, enamels, graffiti* (see note below), varnish, shellac, baked on coatings, labels and decals.

NOTE: SP™915 is damaging to plastic, fiberglass or any synthetic materials. User accepts all responsibility for such use. Do not allow to dry on surface.

PACKAGING

STOCK #: S00915000
UPC CODE: 0-75577-84216-2
FILL WT.: 16 oz.
PER CASE: 12
CARTON DIMENSIONS:
L 11.13" x W 8.44" x H 9.94"

PROPERTIES

BASE TYPE: Solvent
APPEARANCE: Translucent White
ODOR: Ammonia
PROPELLANT: Hydrocarbon
% ACTIVE: 62.00%
WT./GAL.: 6.61
SPECIFIC GRAVITY: 0.80
% VOC: 48.4%
V.O.C. COMPLIANT CALIFORNIA: Yes
V.O.C. COMPLIANT OTC STATES: Yes
FLAMMABLE: Yes
FLASH POINT: < 0 °F
HAZARD CODE: 3, 4, 0




SP915

RESOURCES

MSDS/EDS/PRODUCT DATA SHEETS: sprayon.com
CUSTOMER SERVICE:
1-800-777-2966
TECHNICAL INFORMATION:
1-800-251-2486

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

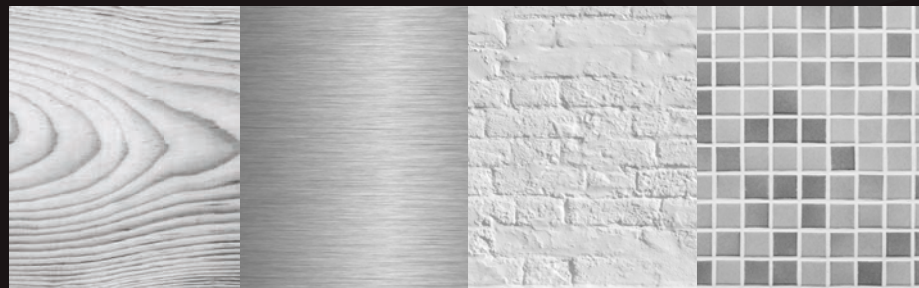

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

PRESERVE. PROTECT. PREVENT.



Sprayon® Products

101 Prospect Ave. NW
Cleveland, OH 44115
Sprayon.com
1-800-777-2966

310-PDS-SP915