

Kent

Seam Sealers

Quality Sealing—Delivering Performance



DTM High-Build Seam Sealer

Kent 2-part Seam Sealers are excellent solutions for sealing replacement body panels.

A variety of viscosities are available to achieve a high-quality finish that duplicates OEM appearance, function and quality.

- Fast cure time reduces the time to complete jobs
- Strong and durable to ensure longer repair life
- Paintable in less than 30 minutes to increase productivity
- No VOC's, 100% solids to prevent shrinking, cracking or blistering when baked
- Self-mixing system ensures the right ratios every time
- Direct-to-Metal*

*For best results always follow OEM recommendations for priming procedure

New
White Color



1588411

Quick Seal Sprayable


A one-part sprayable, modified urethane seam sealer. Matches OEM sprayable sealer, and can be painted and baked immediately after application. Applied with an air applicator gun, a variety of textures can be achieved using tooling and air flow pressure.

- Non-sag formula
- Non-isocyanate formula
- Excellent adhesion flexibility and durability
- 10.3 oz. cartridge






New
White Color




1588410

	Color	Item No.
	Gray	1232171
	Black	1232172
	Beige	1232170
	White	1588410 NEW

Choose the Right Kent Two-Part Epoxy Seam Sealer For Your Job

	Flex-E-6020™ High Build	DTM High Build™ Seam Sealer	Flex-E-6000™ Non-Sag	Flex-E-6115™ Controlled Flow	Flex-E-6001™ Flow Grade
Product	 <p>KT12400</p>	 <p>KT14999 or 1588411</p>	 <p>P10491</p>	 <p>KT12401</p>	 <p>P10486</p>
Features	<ul style="list-style-type: none"> • A high viscosity, fast curing epoxy sealer • Maximum build-20% greater viscosity than Flex-E-6000™ • Color: Rose 	<ul style="list-style-type: none"> • A fast curing, high strength, high builder seam sealer that can be applied direct to metal before priming • Color: Black • OEM Recommended • GM Recommended • Color: White NEW (1588411) 	<ul style="list-style-type: none"> • A fast curing two part epoxy sealer used to quickly and permanently seal seams • Approved for GM specification number 9984532 for in-plant use • Ford Tox No. 042633 • Color: Off-White 	<ul style="list-style-type: none"> • A controlled flow epoxy for semi self-leveling applications • 15% greater viscosity than Flex-E-6001™ • Color: Rose 	<ul style="list-style-type: none"> • A self-leveling epoxy sealer that is high strength and fast curing • Ford Tox Nos.: Base-154691; Curative-179513 • Approved for GM specification number 9984532 for in-plant use • Color: Off-White
Uses	<ul style="list-style-type: none"> • For door skills, door skins, wheel arches, trunk seams, hatch openings, vertical and overhead seams 	<ul style="list-style-type: none"> • For under-hood, under-body and in wheel openings 	<ul style="list-style-type: none"> • For door sills, door skin, trunk seams, hatch openings and coach seams 	<ul style="list-style-type: none"> • For pickup beds, drip rails, trunk openings and other horizontal seams 	<ul style="list-style-type: none"> • Developed with Ford Motor Company, for Ford Mini Vans and SUVs. Also, for drip rails and trunk opening seams

Where To Apply Kent Two-Part Seam Sealers

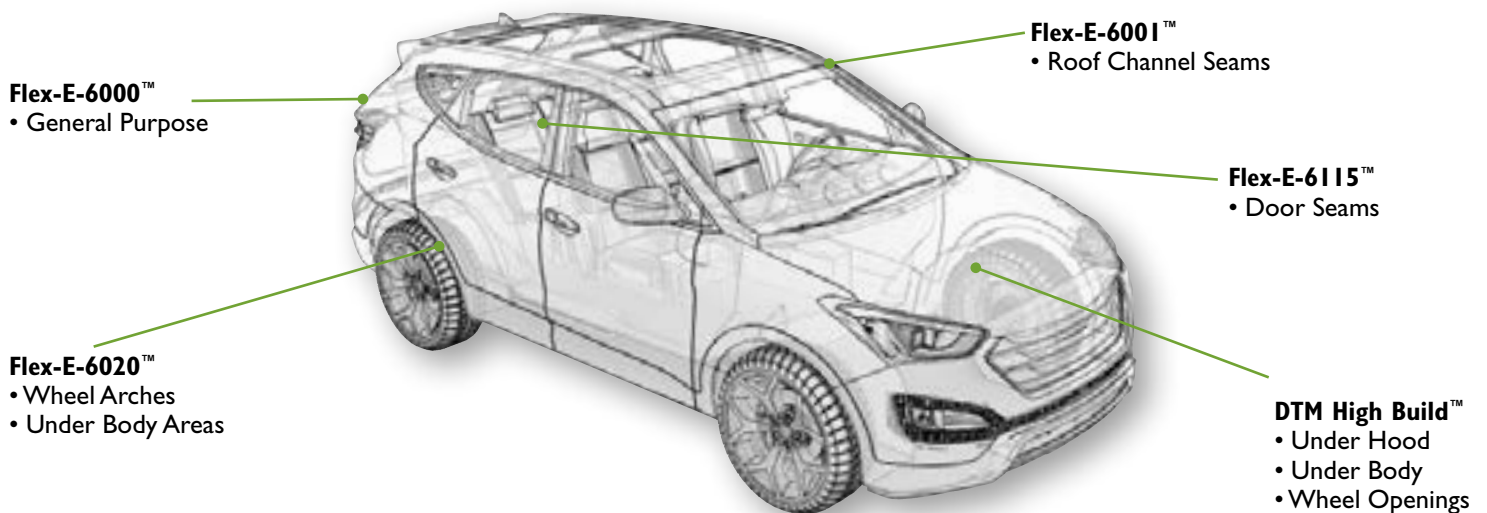

© 2019 Kent Automotive. All rights reserved. Printed in USA.

Ordering Is Easy

On-Site
Your Kent Representative

Online
kent-automotive.com

On The Phone
USA: 888.937.5368 Canada: 800.563.1717